





Description:

- Class 1 production laser station.
- External dimensions: W1238 x P1250 x H2350 mm.
- Laser top worktray/sole dimensions: 578 mm.
- Mechanically welded painted steel frame.
- Control buttons on the front.
- Product footprint 750 x 800 mm.
- Load centred on the worktray up to 100 kg.

Equipment:

- Laser-ready A4 approved window.
- Laser integration.
- Vertical electric door (W770 xH625mm).
- Sensitive cycle start.
- 500mm manual Z-axis with position indicator + wheel.
- LED lights.
- Ø50 tapping to connect fume extractor.
- 19-inch touch screen.

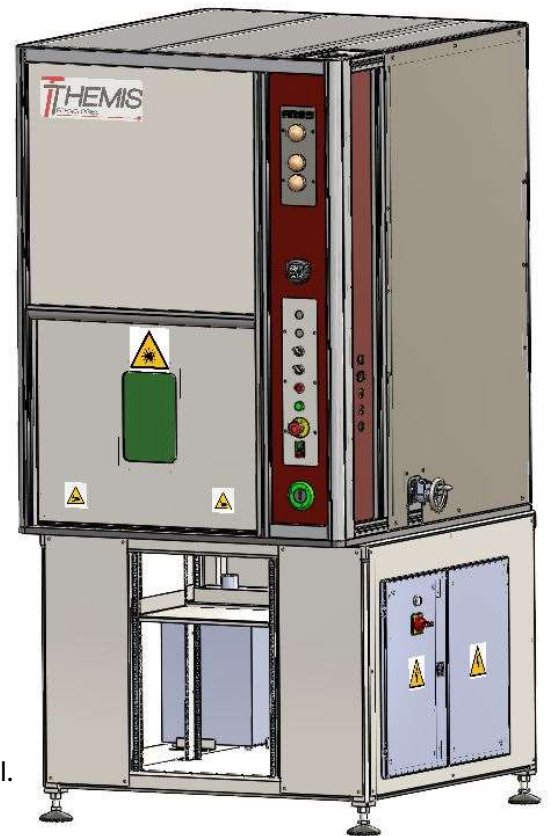

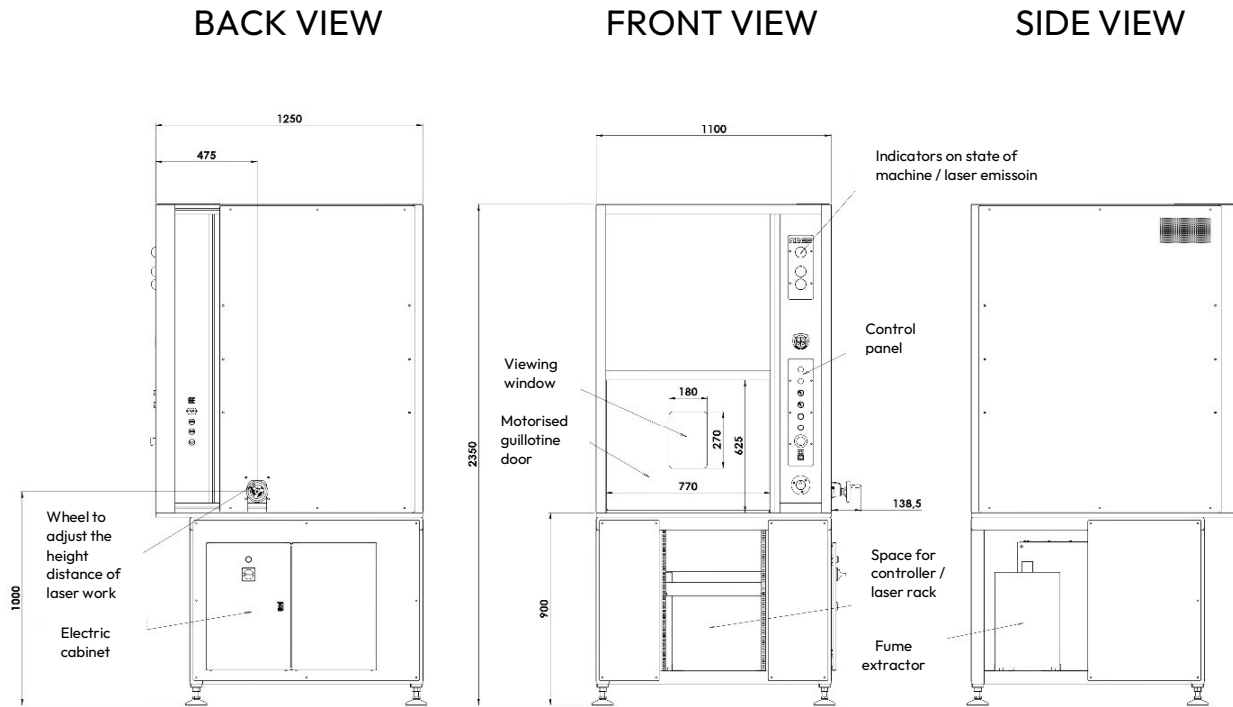

Options:

- Brushless X-, Y- and Z-axis.*
- Grooved worktray 750mm x 750mm.
- Supply and integration of a brushless rotary axis + 3-jaw chuck.*
- Supply and interfacing of a Bofa AD ORACLE type fume extractor adapted to the process with its duct.
- Supervisor 4.0.
- Articulated arm for the screen on the right side.
- Isolating Transformer.
- European Compliance control.
- 2 colours according to customer RAL.

* Option requiring Supervisor 4.0.

