




Description:


- Class 1 production laser station.
- External dimensions: W1190 x D1523 x H2108 mm.
- Laser top worktray/sole dimensions: 190 mm.
- Mechanically welded painted steel frame.
- Rotary worktray Ø600 mm, part footprint W200 x 200 mm.
- Side hinged door with laser-ready approved A4 window.
- Load capacity of 15 kg on each side of the worktray, i.e. 30 kg in total.

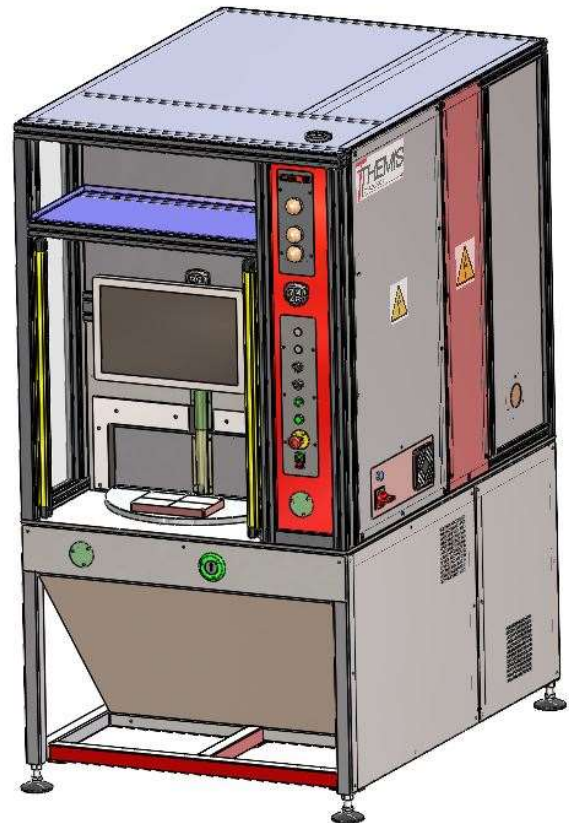

Equipment:

- Ambient camera.
- Supervisor 4.0.
- Duplicated touch cycle start (lateral).
- Fixed Z_axis.
- 19-inch touch screen + bracket.
- LED lighting.
- Finger resolution safety light curtain.
- Ø50mm tapping to connect fume extractor.



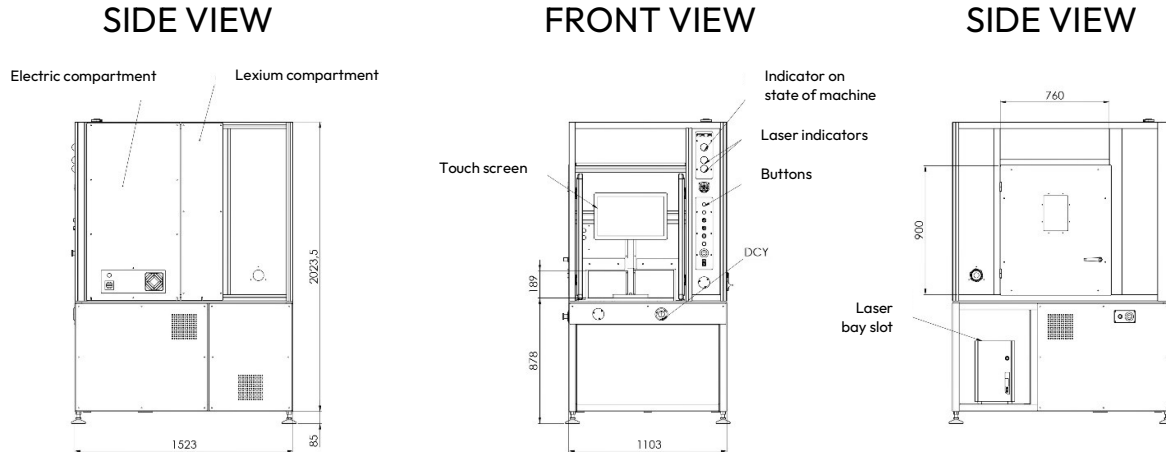

Options* :

- General evaluation for the adaptation of a new laser.
- Supply and integration of a brushless Z-axis.*
- Supply and integration of a manual Z-axis.
- Supply and integration of a rotary axis (stepper motor) equipped with a 3-jaw chuck.
- Supply and integration of a brushless rotary axis + 3-jaw chucks (Qty 2).*
- Supply and interfacing of a Bofa AD ORACLE fume extractor adapted to the process with its duct.
- 2 colours according to customer RAL.
- Isolating Transformer.
- European Compliance control.

